

4.0t/4.5t XF2 Series Mast: (pneumatic)

Type	Model	Max. fork height	Overall height			Free lift		Front Overhang	Tilt Range	Capacity			
			Extended							Load capacity at 500mm			
			Lowered	Without backrest	With backrest	Without backrest	With backrest			Single tire		Dual tire	
			4.0t/4.5t	4.0t/4.5t	4.0t/4.5t	4.0t/4.5t	4.0t/4.5t			4.0t/4.5t	4.0t	4.5t	4.0t
		mm	mm	mm	mm	mm	mm	[°]	kg	kg	kg	kg	
Wide view mast	X2B45M245	2450	1970	3260	3620	150	150	560	6/12	4000	4500	4000	4500
	X2B45M265	2650	2070	3460	3820	150	150	560	6/12	4000	4500	4000	4500
	X2B45M300	3200	2245	3810	4370	150	150	580	6/12	4000	4500	4000	4500
	X2B45M330	3300	2395	4110	4470	150	150	580	6/12	4000	4500	4000	4500
	X2B45M350	3500	2495	4310	4670	150	150	560	6/12	4000	4500	4000	4500
	X2B45M360	3600	2545	4410	4770	150	150	560	6/12	4000	4500	4000	4500
	X2B45M370	3700	2595	4510	4870	150	150	560	6/12	4000	4500	4000	4500
	X2B45M400	4000	2820	4820	5170	150	150	560	6/12	4000	4500	4000	4500
	X2B45M430	4300	2970	5120	5470	150	150	560	6/6	4000	4500	4000	4500
	X2B45M450	4500	3070	5320	5670	150	150	560	6/6	4000	4500	4000	4500
Wide view mast Roll free Doppel-mast	X2B45M470	4700	3170	5520	5870	150	150	560	6/6	3850	4500	4000	4500
	X2B45M480	4800	3295	5695	5970	150	150	560	6/6	3850	4450	3900	4450
	X2B45M500	5000	3395	5895	6170	150	150	560	6/6	3800	4400	3850	4400
	X2B45M550	5500	3645	6395	6670	150	150	560	3/6	3300	3750	3500	4200
	X2B45M600	6000	3895	6895	7170	150	150	560	3/6	2700	3100	3400	3800
	X2B45M245	2450	1970	3260	3620	150	150	560	6/12	4000	4500	4000	4500
	X2B45M330	3300	2320	3810	4370	1440	1080	579	6/12	4000	4500	4000	4500
	X2B45M330	3300	2400	4110	4470	1590	1230	579	6/12	4000	4500	4000	4500
	X2B45M350	3500	2500	4310	4670	1690	1330	579	6/12	4000	4500	4000	4500
	X2B45M370	3700	2600	4510	4870	1790	1430	579	6/12	4000	4500	4000	4500
Wide view mast Roll free Tripple-mast	X2B45M400	4000	2825	4810	5170	2000	1655	579	6/12	4000	4500	4000	4500
	X2B45M400	4000	2050	4810	5170	1240	880	573	6/12	4000	4500	4000	4500
	X2B45M430	4300	5115	5470	5835	1245	885	573	6/6	4000	4500	4000	4500
	X2B45M450	4500	2225	5310	5670	1415	1055	573	6/6	4000	4500	4000	4500
	X2B45M470	4700	2290	5510	5870	1480	1120	573	6/6	3700	4450	4000	4500
	X2B45M480	4800	2375	5675	5970	1500	1205	573	6/6	3700	4400	3800	4450
	X2B45M500	5000	2425	5825	6170	1615	1255	573	6/6	3600	4400	3700	4400
	X2B45M550	5500	2675	6310	6670	1765	1405	573	3/6	3300	3750	3500	4200
	X2B45M600	6000	2820	6810	7170	1860	1500	573	3/6	2700	3100	3400	3800
	X2B45M650	6500	3020	7320	7670	2200	1850	573	3/6	1250	1450	2800	3000
X2B45M700	7000	3275	7975	8170	2300	2105	573	3/6	750	850	2100	2300	

With sidershifter minus 200Kg,with integral sidershifter minus 100kg.

Max.fork height 7.5m or 8.0m is option for full free triplex mast.

5.0t/5.5t XF2 Series Mast: (pneumatic)

Type	Model	Max. fork height	Overall height										Free lift				Front Overhang		Tilt Range		Capacity			
			Extended						Without backrest		With backrest		Load capacity at 500mm											
			Lowered		Without backrest		With backrest						F/R		Single tire		Dual tire							
			5.0t	5.5t	5.0t	5.5t	5.0t	5.5t	5.0t	5.5t	5.0t	5.5t	5.0t	5.5t	5.0t	5.5t	5.0t	5.5t						
			mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	(°)	kg	kg	kg	kg			
Wide view mast	X2B50/X2B55M245	2450	1970	2070	3260	3295	3830	3830	150	160	150	160	580	570	6/12	5000	5500	5000	5500					
	X2B50/X2B55M265	2650	2070	2170	3460	3495	4030	4030	150	160	150	160	580	570	6/12	5000	5500	5000	5500					
	X2B50/X2B55M300	3000	2245	2345	3610	3645	4180	4180	150	160	150	160	580	570	6/12	5000	5500	5000	5500					
	X2B50/X2B55M330	3300	2385	2485	4110	4145	4680	4680	150	160	150	160	580	570	6/12	5000	5500	5000	5500					
	X2B50/X2B55M350	3500	2495	2595	4310	4345	4880	4880	150	160	150	160	580	570	6/12	5000	5500	5000	5500					
	X2B50/X2B55M360	3600	2545	2645	4410	4445	4980	4980	150	160	150	160	580	570	6/12	5000	5500	5000	5500					
	X2B50/X2B55M370	3700	2595	2695	4510	4545	5080	5080	150	160	150	160	580	570	6/12	5000	5500	5000	5500					
	X2B50/X2B55M400	4000	2820	2920	4820	4820	5380	5380	150	160	150	160	580	570	6/12	5000	5500	5000	5500					
	X2B50/X2B55M430	4300	2970	3070	5120	5220	5680	5680	150	160	150	160	580	570	6/6	5000	5500	5000	5500					
	X2B50/X2B55M450	4500	3070	3170	5380	5480	5940	5940	150	160	150	160	580	570	6/6	5000	5500	5000	5500					
Wide view mast Full free Doppel mast	X2B50/X2B55M470	4700	3170	3270	5520	5620	6080	6080	150	160	150	160	580	570	6/6	4800	5200	5000	5500					
	X2B50/X2B55M480	4800	3295	3395	5695	5795	6180	6180	150	160	150	160	560	570	6/6	4700	4900	4800	4950					
	X2B50/X2B55M500	5000	3395	3495	5895	5995	6390	6390	150	160	150	160	560	570	6/6	4500	4800	4800	5300					
	X2B50/X2B55M550	5500	3645	3745	6395	6495	6880	6880	150	160	150	160	560	570	3/6	4100	4500	4600	4800					
	X2B50/X2B55M600	6000	3895	3995	6895	6995	7380	7380	150	160	150	160	560	570	3/6	3300	3500	4400	4600					
	X2B50/X2B55P245	2450	1975	2075	3260	3260	3830	3830	1165	1220	595	605	579	584	6/12	5000	5500	5000	5500					
	X2B50/X2B55U300	3000	2225	2350	3830	3830	4380	4380	1440	1500	870	970	579	584	6/12	5000	5500	5000	5500					
	X2B50/X2B55U330	3300	2400	2500	4110	4150	4680	4680	1590	1650	1020	1120	579	584	6/12	5000	5500	5000	5500					
	X2B50/X2B55U350	3500	2500	2600	4310	4350	4880	4880	1690	1750	1120	1220	579	584	6/12	5000	5500	5000	5500					
	X2B50/X2B55U370	3700	2600	2700	4510	4550	5080	5080	1790	1850	1220	1320	579	584	6/12	5000	5500	5000	5500					
Wide view mast Full free Ripple mast	X2B50/X2B55U400	4000	2825	2925	4825	4825	5380	5380	2000	2000	1445	1445	579	584	6/12	5000	5500	5000	5500					
	X2B50/X2B55N400	4000	2050	2150	4810	4810	5380	5380	1240	1330	670	770	573	583	6/12	5000	5500	5000	5500					
	X2B50/X2B55N430	4300	2165	2265	5110	5110	5680	5680	1310	1445	675	685	573	583	6/6	5000	5500	4800	4900					
	X2B50/X2B55N450	4500	2225	2325	5310	5310	5880	5880	1415	1500	845	945	573	583	6/6	5000	5500	5000	5500					
	X2B50/X2B55N470	4700	2290	2390	5510	5510	6080	6080	1480	1570	910	1010	573	583	6/6	4700	5000	5000	5500					
	X2B50/X2B55N480	4800	2375	2475	5610	5610	6180	6180	1500	1500	995	1095	573	583	6/6	4600	4800	4800	5200					
	X2B50/X2B55N500	5000	2425	2525	5810	5810	6380	6380	1615	1700	1045	1145	573	583	6/6	4500	4700	4800	5000					
	X2B50/X2B55N550	5500	2575	2675	6310	6310	6880	6880	1765	1880	1195	1295	573	583	3/6	3900	4300	4600	4800					
	X2B50/X2B55N600	6000	2800	2900	6810	6810	7380	7380	1980	2020	1420	1520	573	583	3/6	3200	3500	4400	4600					
	X2B50/X2B55N700	7000	3210	3310	7810	7810	8380	8380	2200	2240	1670	1710	573	583	3/6	2800	3100	3800	4000					
X2B50/X2B55N700	7000	3275	3375	7810	7810	8380	8380	2300	2300	1895	1995	573	583	3/6	1000	1800	2450	2650						

With sideshifter minus 200Kg,with integral sideshifter minus 100kg.

Max.fork height 7.5m or 8.0m is option for full free triplex mast.

HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat



Download "Hangcha Forklift" App



ISO45001
ISO45001:2018



ISO14001
ISO14001:2015



ISO9001
ISO9001:2015



HANGCHA trucks conform to the European Safety Requirements



XF2 SERIES

IC COUNTERBALANCED TRUCKS

With capacity of 4,000 to 5,500kg

XF2 SERIES

IC COUNTERBALANCED TRUCKS

The XF2 series is an upgraded product independently developed by Hangcha using advanced technology. Through comprehensive upgrades in appearance design, energy efficiency, safety and stability, reliability and durability, and comfort and convenience, the overall performance of the truck has been significantly improved compared to the original product, making it a forklift truck that meets all your needs.



**NEW
DESIGN**

- The XF2 series adopts a unified product appearance style, innovating within the classics, with smooth, dynamic, and powerful lines that exude a sense of technology.
- The fully enclosed instrument control panel and the flowing LED tail lights are more finely assembled, making the truck simple and aesthetically pleasing.

ENERGY-EFFICIENT AND ENVIRONMENTALLY FRIENDLY

**STAGE V
CERTIFIED**

ENGINE & TRANSMISSION

Equipped with diesel engines, LPG engines, and dual-fuel engines that meet Euro V and North American certification standards, these engines offer lower emissions and reduced energy consumption, catering to the diverse engine requirements of different customers.


Energy consumption reduced by **8%**

- The Diesel Particulate Filter (DPF) after-treatment system features both on-the-go and stationary regeneration strategies, achieving carbon accumulation balance during standard operating conditions and extending the cleaning cycle.
- Standardized with load-sensitive multi-way valves and a high-pressure hydraulic system, which reduces energy loss and significantly increases lifting speed.



LIFT SPEED
INCREASED BY **16%**

- The entire truck is equipped with an LED lighting system, which saves energy, reduces electricity consumption, and greatly extends the lifespan of the lights.
- Streamer LED taillights are developed and used to make the vehicle more ethereal with a strong high-tech impact.

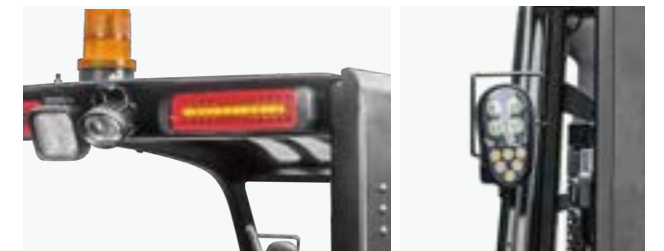

The truck dimensions and turning radius have been significantly reduced, making the truck more maneuverable and agile in operation.



PROTECT YOUR INVESTMENT

The vehicle's center of gravity is reduced by 5%

The use of a split counterweight design ensures an optimal distribution of load on the axle, with a low center of gravity for enhanced stability.

The front overhang of the triplex mast is reduced by 10%

The adoption of a new slot structure mast significantly reduces the overhang of the triplex mast, greatly increasing the residual capacity and improving the load capability.



The truck comes standard with OPS system, and an optional adjustable speed limit function is available to enhance operational safety.



COMFORT AND CONVENIENCE

- Optimized ergonomic design, enlarged cab space, an optional new-generation fingertip operating system.
- The standard low-angle throttle pedal reduces driver fatigue.
- The application of large-area sound-absorbing materials and low-noise gear pumps, among other noise reduction measures, ensures low noise levels around the driver's ears.



A color interactive LED instrument panel is used, which can display the truck's status, set parameters, switch languages, etc., facilitating human-machine information interaction.

An intelligent controller can realize the functions of OPS system, and flameout for idle speed time out, and can have other optional functions of speed control, speed limiting for faults, lifting at a high idle speed, automatic fork leveling, etc.

ALL-ROUND VISIBILITY

The ultra-wide view mast and the rear-tilted counterweight design provide an expanded field of vision to the front and rear of the truck, especially a significant enhancement in the view to the front of the triplex mast.

Optimized design provides outstanding visibility in all directions.



Triple Mast's field of view increased by **60%**

Rear maneuvering vision increased by **15%**



RELIABLE AND DURABLE

- Parking brake: A central brake requiring less operating force.
- The use of high-strength maintenance-free wet brake drive axle significantly improves the reliability of the braking system and extends its service life.
- Key components use waterproof connectors, elevating the protection level of the electrical system.
- All joints are 24° conic joints and each high-pressure pipe joint has a pressure measuring port that enables better sealing and offers better maintainability.
- Both the drive axle and the gearbox are expected to have a service life of far longer than 10 years, and the wet brake 10 years. Enhanced four-piece rims are used.

Equipped with an oversized radiator, the frontal area for both water and oil cooling is greatly increased, significantly reducing the water and oil temperatures, making the truck more durable.



Radiator frontal area increased by **28%**

The adoption of an open-casting flexible steering axle with strengthened axle body and high-position design enhances the reliability of the steering axle.



The steering axle is installed with rubber pad, which effectively improves the operation comfort and reliability.



Breaking through the limitation of the traditional steering axle structure, the newly developed cast open steering axle has the maximum internal turning angle increased from **79°** to **82°**, it can help customers work in narrow space.

The use of floating OHG and floating transmission, the dual-suspension vibration reduction system results in minimal truck vibration.

The OHG is designed with pre-set installation holes, allowing customers to easily convert the truck into a cab by adding doors and windows, making it more user-friendly.



EASY MAINTENANCE

- The increased opening angle of the hood provides a larger serviceable space.
- The counterweight features a large opening design, allowing for the removal of the after-treatment system without disassembling the counterweight, making maintenance more convenient.



Maintenance space

increased by 10%

Features

Truck	Standard	Options
Plate-fin heat dissipater	●	
Mechanical handbrake	●	
Dynamic load sending control valve	●	
Double-Layer Soundproof Hood Padding	●	
Tilt Cylinder Boot	●	
Reinforced wheel rim	●	
Cab		○
Heater		○
Front windshield and wiper		○
Solid tire		○
Dual air filter		○
Fan		○
Fully-suspended seat		○
Customer paint		○
Toolbox		○
Fire extinguisher (1kg)		○
Transmission		
Fully-suspended gearbox	●	
Dual front wheel		○
Steering		
Wet braking drive axle	●	
Open cast steering axle	●	
Fully hydraulic power steering gear	●	
Steering wheel adjusting device	●	
Power		
High-efficiency air filter	●	
High-efficiency air intake silencer	●	
High-position exhauster	●	
Fan protection device	●	
Body		
Traction pin	●	
Counterweight net	●	
Lockable hood	●	
Dissipater grille cover		○
Rotating handle of water tank lid		○
Fuel tank cap with lock		○
Additional L/R rearview mirrors		○
Hydraulic		
Electro-hydraulic steering	●	
Low-noise gear pump	●	
Hydraulic oil recycling filter	●	
5th valve		○

Features

Control	Standard	Options
Fingertip system		○
Pedal parking brake		○
Overhead Guard		
Fully-suspended overhead guard	●	
Right rear armrest with horn button	●	
PVC shed	●	
Perforated overhead guard		○
Electrical		
Multifunctional interactive instruments	●	
Combination LED lighting system	●	
Integrated combination switch	●	
Main power switch	●	
LED rear working light		○
OPS system	●	
Multi-segment adjustable speed limit		○
Blue light		○
Audible and visual alarm		○
Mast		
Full free duplex mast	●	
Different length of fork	●	
Triplex mast	●	
Wider fork carriage	●	
Heightened load backrest	●	
Duplex mast	●	
Attachments		
Paper roll clamp		○
Rotatable roll clamp		○
Load stabilizer		○
Multi-purpose barrel clamp		○
Weighing system		○
Sideshifter		○
Rotating fork		○
Fork sleeve		○
Crane arm		○
Special fork		○
Soft package clamp		○
Oil barrel clamp		○
Tipping clamp		○
Hook		○
Carton clamp		○
Push-pull device		○
Bucket		○
String Pole		○

Technical Data

Distinguishing mark	1.1	Manufacturer(abbreviation)		HANGCHA GROUP CO.,LTD.											
	1.2	Manufacturer's type designation		CPCD40-X2H8F	CPCD45-X2H8F	CPCD50-X2XH8F	CPCD55-X2XH8F	CPCD40-X2W998N	CPCD45-X2W998N	CPCD50-X2XW998N	CPCD55-X2XW998N	CPYD40-X2H118N	CPYD45-X2H118N	CPYD50-X2XH118N	CPYD55-X2XH118N
	1.3	Drive: electric (battery type, mains, ...), diesel, petrol, fuel gas		Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	LPG	LPG	LPG	LPG
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated
	1.5	Rated capacity/ rated load	Q (kg)	4000	4500	5000	5500	4000	4500	5000	5500	4000	4500	5000	5500
	1.6	Load centre distance	c (mm)	500	500	500	500	500	500	500	500	500	500	500	500
	1.8	Load distance, centre of drive axle to fork	x (mm)	560	560	560	570	560	560	560	570	560	560	560	570
	1.9	Wheelbase	y (mm)	2000	2000	2100	2100	2000	2000	2100	2100	2000	2000	2100	2100
	Weight	2.1	Service weight	kg	6400	6600	6900	7300	6400	6600	6900	7300	6400	6600	6900
2.2		Axle loading, laden front/ rear	kg	8980/1420	9725/1375	10430/1470	11300/1500	8980/1420	9725/1375	10430/1470	11300/1500	8980/1420	9725/1375	10430/1470	11300/1500
2.3		Axle loading, unladen front/ rear	kg	2850/3550	2850/3750	2900/4000	3000/4300	2850/3550	2850/3750	2900/4000	3000/4300	2850/3550	2850/3750	2900/4000	3000/4300
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic
	3.2	Tyre size, front		8.25-15-14PR	300-15-18PR	300-15-18PR	300-15-18PR	8.25-15-14PR	300-15-18PR	300-15-18PR	300-15-18PR	8.25-15-14PR	300-15-18PR	300-15-18PR	300-15-18PR
	3.3	Tyre size, rear		7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-14PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-14PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-14PR
Dimensions	3.5	Wheels, number front/ rear(=driven wheels)		2	2	2	2	2	2	2	2	2	2	2	2
	3.6	Tread, front	b10 (mm)	1160	1150	1150	1150	1160	1150	1150	1150	1160	1150	1150	1150
	3.7	Tread, rear	b11 (mm)	1130	1130	1130	1130	1130	1130	1130	1130	1130	1130	1130	1130
	4.1	Tilt of mast/fork carriage forward/backward	a/b (°)	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12
	4.2	Height, mast lowered	h1 (mm)	2245	2245	2245	2245	2245	2245	2245	2245	2245	2245	2245	2245
	4.3	Free lift	h2 (mm)	150	150	150	160	150	150	150	160	150	150	150	160
	4.4	Lift	h3 (mm)	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
	4.5	Height, mast extended	h4 (mm)	4170	4170	4380	4380	4170	4380	4380	4170	4380	4380	4380	4380
	4.7	Height of overhead guard	h6 (mm)	2320	2320	2320	2320	2320	2320	2320	2320	2320	2320	2320	2320
	4.8	Seat height relating to SIP/stand height	h7 (mm)	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380
	4.12	Coupling height	h10 (mm)	675	675	675	675	675	675	675	675	675	675	675	675
	4.19	Overall length	l1 (mm)	4130	4160	4250	4320	4130	4160	4160	4320	4130	4160	4160	4320
	4.20	Length to face of forks	l2 (mm)	3060	3090	3180	3250	3060	3090	3180	3250	3060	3090	3180	3250
	4.21	Overall width	b1/b2 (mm)	1420/1940	1450/1940	1450/1940	1450/1940	1420/1940	1450/1940	1450/1940	1450/1940	1420/1940	1450/1940	1450/1940	1450/1940
	4.22	Fork dimensions DIN ISO 2331	s / e / l (mm)	50/150/1070	50/150/1070	50/150/1070	60/150/1070	50/150/1070	50/150/1070	60/150/1070	60/150/1070	50/150/1070	50/150/1070	50/150/1070	60/150/1070
	4.23	Fork carriage ISO 2328, class/type A,B		IIIA	IIIA	IV A	IV A	IIIA	IIIA	IV A	IV A	IIIA	IIIA	IV A	IV A
	4.24	Fork-carriage width	b3 (mm)	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250
	4.31	Ground clearance, laden, below mast	m1 (mm)	145	145	145	145	145	145	145	145	145	145	145	145
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	230	230	230	230	230	230	230	230	230	230	230	230
	4.34.1	Aisle width for pallets 1000 • 1200 crossways	As1 (mm)	4390	4420	4510	4580	4390	4420	4510	4580	4390	4420	4510	4580
	4.34.2	Aisle width for pallets 800 • 1200 lengthways	As1 (mm)	4590	4620	4710	4780	4590	4620	4710	4780	4590	4620	4710	4780
	4.35	Turning radius	Wa (mm)	2630	2660	2750	2810	2630	2660	2750	2810	2630	2660	2750	2810
4.36	Internal turning radius	b13 (mm)	692	692	749	749	692	692	749	749	692	692	749	749	
Performance data	5.1	Travel speed, laden/unladen	km/h	23.5/24	23.5/24	23.5/24	23.5/24	23.5/24	23.5/24	23.5/24	23.5/24	23.5/24	23.5/24	23.5/24	23.5/24
	5.2	Lift speed, laden/unladen	m/s	0.52/0.55	0.52/0.55	0.45/0.47	0.45/0.47	0.58/0.61	0.58/0.61	0.50/0.52	0.50/0.52	0.61/0.64	0.61/0.64	0.52/0.55	0.52/0.55
	5.3	Lowering speed, lade/unladen	m/s	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5	0.45/0.5
	5.6	Max. drawbar pull, laden/unladen	N	36500/21000	36500/21000	36500/21000	36500/21000	38500/21000	38500/21000	38500/21000	38500/21000	38600/21000	38600/21000	38600/21000	38600/21000
	5.8	Max. gradeability, laden/unladen	%	24/23	23/23	22/20	21/20	30/23	28/23	26/20	25/20	30/23	28/23	26/20	25/20
Combustion- engine	5.10	Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
		Parking brake		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
	7.1	Engine manufacturer /type		XINCHAI/4E30YG52	XINCHAI/4E30YG52	XINCHAI/4E30YG52	XINCHAI/4E30YG52	KUBOTA/V3307-CR-TIE5B				KUBOTA/WG3800-L-E5C			
		Emission standard		EU StageV	EU StageV	EU StageV	EU StageV	EU StageV/ EPA Tier 4F				EU StageV/ EPA Tier 2/ CARB Tier 3			
	7.2	Engine power according to ISO 1585	kW	55.8	55.8	55.8	55.8	54.6	54.6	54.6	54.6	61.6	61.6	61.6	61.6
	7.3	Rated speed	min ⁻¹	2200	2200	2200	2200	2200	2200	2200	2200	2300	2300	2300	2300
	7.4	Number of cylinders/ displacement	(-)/[cm³]	4/2970	4/2970	4/2970	4/2970	4/3331	4/3331	4/3331	4/3331	4/3769	4/3769	4/3769	4/3769
Drive unit	7.10	Battery voltage/ nominal capacity	[V]/[Ah]	12/105	12/105	12/105	12/105	12/105	12/105	12/105	12/105	12/90	12/90	12/90	12/90
		Rated torque	[N·m]/[r/min]	320/1200-1600	320/1200-1600	320/1200-1600	320/1200-1600	330/1400	330/1400	330/1400	330/1400	282.4/1200	282.4/1200	282.4/1200	282.4/1200
	8.1	Type of drive unit		Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
		Speeds FWD/RVS		1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1
	10.1	Operating pressure for attachments	MPa	16	16	16	16	16	16	16	16	16	16	16	16
Addition data	10.2	Oil volume for attachments	ℓ/min	40	40	40	40	40	40	40	40	40	40	40	40
	10.4	Fuel tank capacity	ℓ	90	90	100	100	90	90	100	100	/	/	/	/

Optional Engine

Combustion - engine		Manufacturer's type designation		H8	H12	H20	W24	W58
		Drive		Diesel	GAS/LPG	LPG	LPG	Diesel
	7.1	Engine manufacturer /type		XINCHAI/4E30YG52	KUBOTA/WG3800-GL-E3C	PSI 4.3	PSI 4.3	CUMMINS QSF2.8
		Emission standard		EU StageV	EU StageV/ EPA Tier 2/ CARB Tier 3	EU StageV	EPA Tier 2/ CARB Tier 3	EU StageIIIB/ Tier 4F
		Rated capacity/ rated load	Q[kg]	4000-5500	4000-5500	4000-5500	4000-5500	4000-5500
Drive unit	7.2	Engine power according to ISO 1585	kW	55.8	65.4/4/LP-54.6	79.75	77	55
	7.3	Rated speed	min ⁻¹	2200	2300	2300	2300	2200
	7.4	Number of cylinders/ displacement	(-)/[cm ³]	4/2970	4/3769	6/4294	6/4294	4/2800
		Rated torque	[N·m]/[r/min]	320/1200-1600	6.248.5/1400/LP-273.1/1200	332.5/2000	332.85/1400	298/1600
	8.1	Type of drive unit		Powershift	Powershift	Powershift	Powershift	Powershift
Drive unit		Speeds FWD/RVS		1/1	1/1	1/1	1/1	1/1
		F[CHINA]	F	✓	✗	✗	✗	✗
		OKAMURA[JAPAN]	B	✓	✓	✓	✓	✓

